

LED flexible transparent film display

Applications



Nightclub & bar



Church



Lobby



Hotel



Conference Room



Retail Store




Shopping Malls



School



Theater

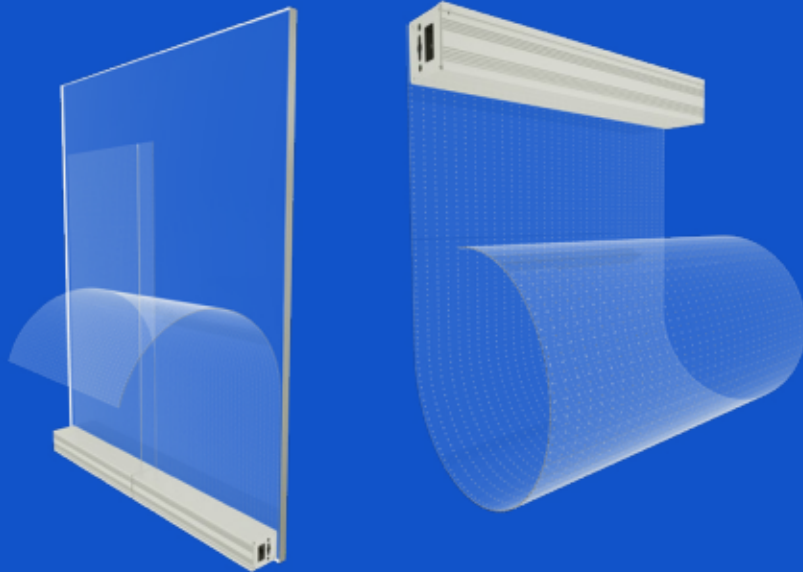


Specification


Parameter Name	Product parameters			
LED model	SMD 121 three-in-one integrated drive			
pixels	P6	P8	P10	P12
Module resolution	136x54	100x50	80x40	50x30
Pixels per panel	8704	5000	3200	1500
pixel density (point/㎡)	27777	15625	19000	2300
Module size (WxHxD)	816x385x2	800x400x2	800x400x2	1000x400x2
Module area	0.31(㎡)	0.32(㎡)	0.32(㎡)	0.40(㎡)
Permeability	≥85	≥90	≥95	≥97
Brightness	4000	4000	4000	4000
Brightness/ chrominance uniformity	≥97%			
Perspective (H+V)	160x160			
life	100,000H			
Breakpoint continuation	Support			
Operating temperature	-40°C-80°C			
Bending installation	Support			
Color processing	16bit			
Weight	2kg/㎡			
Supply voltage	3V			

* Specifications and photos are subject to change without prior notice.



LED flexible transparent film display

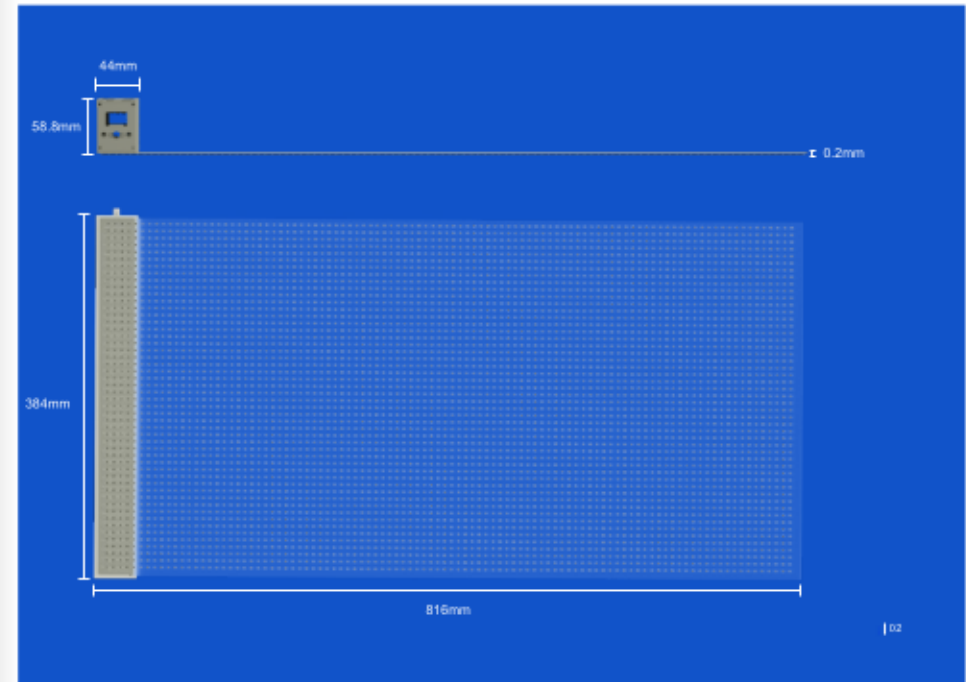


Bendable · Can Be Cut

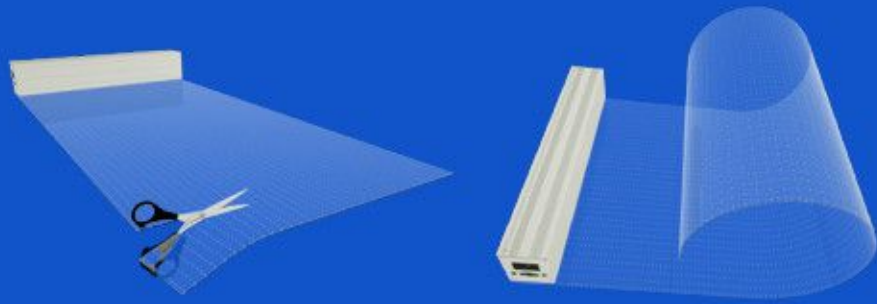

Easy To Install
Self-developed glue filling process

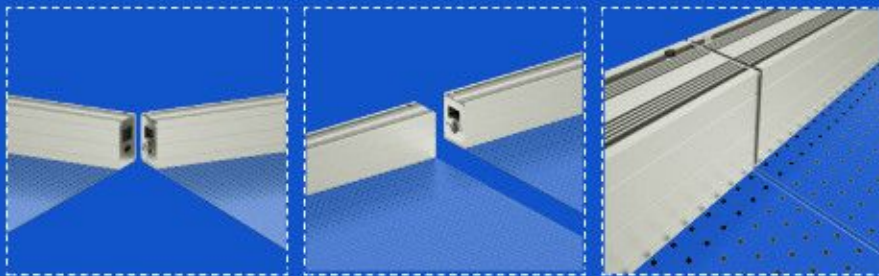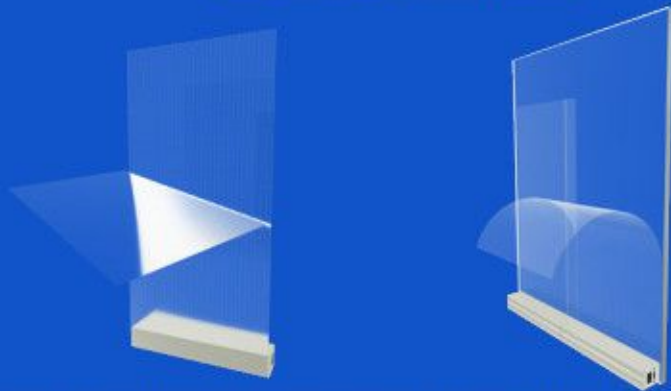

Typical Project

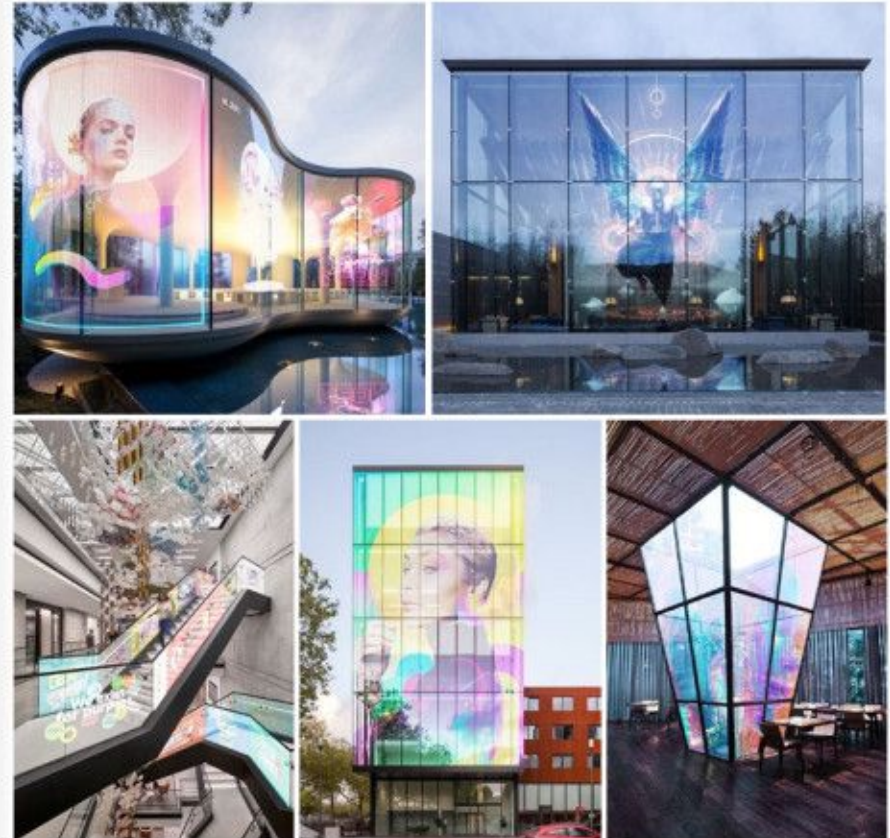

Features



High 4000cd/m²
Tailorable



Soft Curvature to 1,100R



Support transferring with interruption
resuming capability



Light · thin · Through
Light Weight 3kg/m²
Ultra Thin Thickness as low as 2mm
Transparent Permeability 45% · Through